

Surface Mount

Voltage Variable Equalizer

VAEQ-1000+

50Ω

50 to 1000 MHz

The Big Deal

- Adjustable attenuation slope
- IP3 +45 dBm typical
- Minimal deviation from linear loss, ± 0.4 dB



CASE STYLE: HE1354

Product Overview

The VAEQ-1000+ is a 50Ω Voltage Variable Equalizer built into a shielded case. (size of .394"x.394"x.150") This model offers excellent performance over a wide frequency range of 50 to 1000 MHz with the variable slope providing great flexibility in a small package.

The VAEQ-1000+ is often used to compensate RF chain gain flatness or cable loss versus frequency.

Key Features

Feature	Advantages
Low power consumption: <ul style="list-style-type: none">• Supply voltage +5V_{DC} at max 4mA• Control voltage 0-10V at max 40mA	Allows for high layout density of circuit boards, while minimizing affects of parasitics.
Adjustable attenuation slope (Control voltage of 0V to 10V)	Allows adjusting the slope to compensate for the precise losses encountered.
High linearity (IP3 +45 dBm typ.)	Low distortion enabling improved system performance.
Minimal deviation from linear loss over frequency range: ± 0.2 dB	Provides low signal distortion over the passband.



For detailed performance specs
& shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Surface Mount

Voltage Variable Equalizer

VAEQ-1000+

50Ω

50 to 1000 MHz

Features

- Wide bandwidth
- Low insertion loss
- Low deviation from linear loss, ± 0.4 dB typ.
- High IP3 +45 dBm typ.
- Shielded case
- Aqueous washable



CASE STYLE: HE1354
 PRICE: \$9.95 ea. QTY (10)

Applications

- Cable loss compensation
- Instrumentation

+RoHS Compliant
 The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C, V+=5V_{DC} unless otherwise noted


Parameter	Condition	Min.	Typ.	Max.	Units
Frequency Range		50		1000	MHz
Insertion Loss	50 MHz, Control Voltage, 0 - 10V		15.2 - 2.2		dB
	1000 MHz, Control Voltage, 0 - 10V		1.7 - 1.6		
Deviation from Linear Loss	50 - 1000 MHz, Control Voltage 0 - 10V		± 0.4		dB
IP3	50 - 1000 MHz, Control Voltage, 1 - 10V	+33	+45		dBm
1 dB Compression	50 - 1000 MHz, Control Voltage, 0 - 10V		+30		dBm
Input Return Loss	50 - 1000 MHz, Control Voltage, 0 - 10V		17.5		dB
Output Return Loss	50 - 1000 MHz, Control Voltage, 0 - 10V		17.5		dB
Supply Voltage (V+)	50 - 1000 MHz, Control Voltage, 0 - 10V		5.0		V
Supply Current	50 - 1000 MHz, Control Voltage, 10V		0		mA
	50 - 1000 MHz, Control Voltage, 0V		2	4	
Control Current	50 - 1000 MHz, Control Voltage, 10V		32	40	mA
	50 - 1000 MHz, Control Voltage, 1V		0		

Maximum Ratings

Parameter	Ratings
Operating Temperature	0°C to 85°C
Storage Temperature	-55°C to 100°C
Input Power	+23 dBm
Control voltage	7 V
Supply Voltage (V+)	12 V

Permanent damage may occur if any of these limits are exceeded.

Simplified Functional Diagram

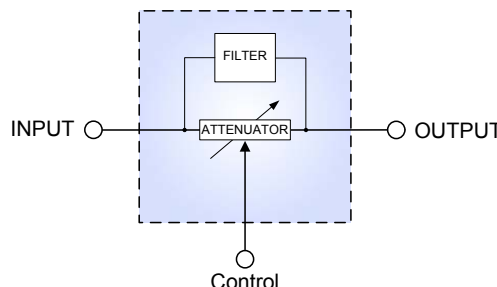

Pad Connections

Function	Pad Number
RF IN	1
RF OUT	6
V CONTROL	3
V+	4
GROUND	2,5

Permanent damage may occur if any of these limits are exceeded.



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
 M138835
 VAEQ-1000+
 EDR-9802F1
 RAV
 121219
 Page 2 of 5

Voltage Variable Equalizer

VAEQ-1000+


Outline Drawing

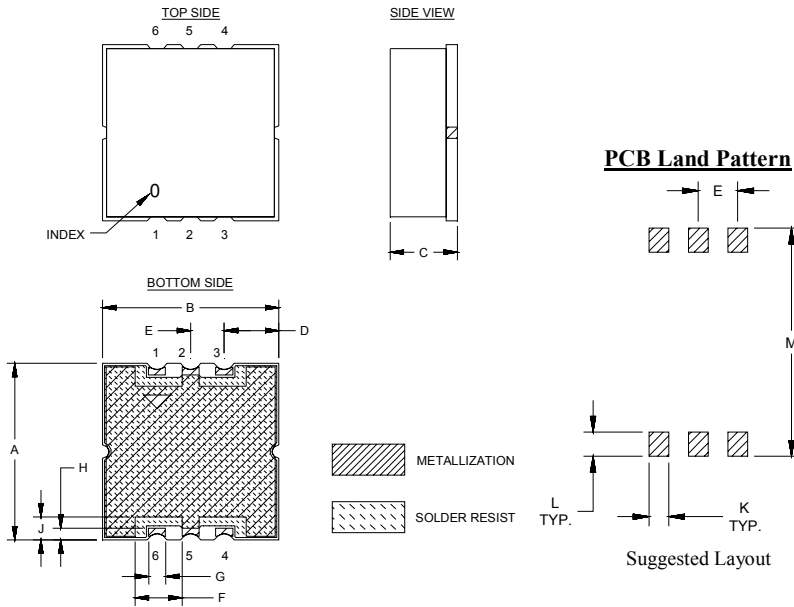

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	wt.
.394	.394	.150	.122	.075	.098	.038	.026	.051	.038	.046	.434	grams
10.01	10.01	3.81	3.10	1.90	2.49	0.97	0.66	1.29	0.97	1.17	11.02	0.7

Demo Board MCL P/N: TB-474+ Suggested PCB Layout (PL-285)

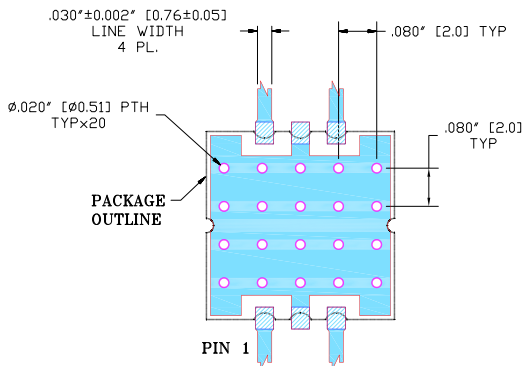

NOTE:

- TRACE WIDTH IS SHOWN FOR R04350 WITH DIELECTRIC THICKNESS. $.030 \pm 0.002$ ". COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com
IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Frequency (MHz)	Insertion Loss (dB)		Input Return Loss (dB)		Output Return Loss (dB)		Deviation from Linear Loss (dB)		Insertion Phase (deg)		Input IP3 (dBm)	
	Vcontrol 1V	Vcontrol 10V	Vcontrol 1V	Vcontrol 10V	Vcontrol 1V	Vcontrol 10V	Vcontrol 1V	Vcontrol 10V	Vcontrol 1V	Vcontrol 10V	Vcontrol 1V	Vcontrol 10V
50	15.41	2.10	23.76	28.70	23.68	28.76	0.94	0.36	12.99	-3.28	36.73	46.48
100	14.57	2.08	22.02	35.57	21.89	35.64	0.55	0.35	11.96	-11.54	43.32	47.18
150	13.50	2.10	19.86	42.01	19.68	41.01	0.14	0.31	11.01	-18.73	-	-
200	12.35	2.13	18.02	43.40	17.84	40.52	0.21	0.25	8.33	-25.63	48.87	46.63
250	11.23	2.17	16.44	37.92	16.29	36.57	0.50	0.18	3.88	-32.41	-	-
300	10.17	2.22	15.18	33.99	15.05	33.10	0.66	0.10	1.74	-39.12	49.29	47.62
350	9.21	2.29	14.12	31.00	13.97	30.15	0.78	0.00	8.58	-45.78	-	-
400	8.33	2.39	13.25	28.28	13.14	27.68	0.78	-0.12	15.85	-52.33	45.80	46.51
450	7.54	2.51	12.55	25.79	12.41	25.20	0.76	-0.24	24.03	-58.78	-	-
500	6.80	2.68	12.01	23.40	11.86	22.83	0.63	-0.40	32.20	-65.00	43.01	45.87
550	6.16	2.86	11.59	20.93	11.46	20.53	0.50	-0.54	41.09	-70.83	-	-
600	5.54	3.08	11.34	18.42	11.19	18.23	0.30	-0.67	49.87	-75.91	44.56	46.33
650	4.98	3.24	11.22	15.97	11.14	15.97	0.10	-0.70	59.08	-79.93	-	-
700	4.44	3.15	11.31	13.87	11.21	14.03	0.10	-0.52	68.37	-82.85	42.19	46.04
750	3.91	2.75	11.60	12.44	11.64	12.75	0.28	-0.19	77.81	-86.77	-	-
800	3.37	2.18	12.27	11.85	12.32	12.23	0.40	0.25	87.66	-92.77	45.44	45.98
850	2.79	1.85	13.42	11.77	13.61	12.25	0.58	0.48	98.04	-100.76	-	-
900	2.18	1.63	15.28	11.89	15.87	12.38	1.00	0.66	109.81	-108.77	46.64	46.90
1000	1.60	1.64	14.51	13.72	15.74	14.40	0.00	0.59	138.90	-121.24	45.32	48.86




For detailed performance specs & shopping online see web site


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.


VAEQ-1000+
INSERTION LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES

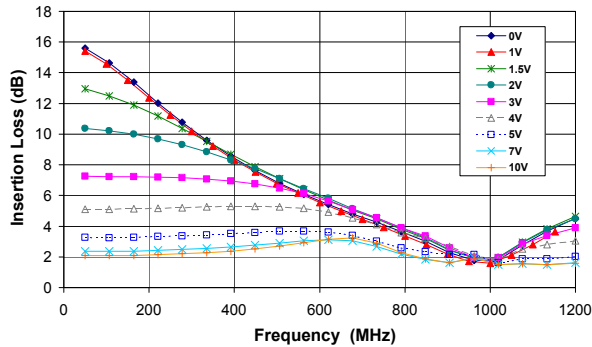


VAEQ-1000+
INPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES

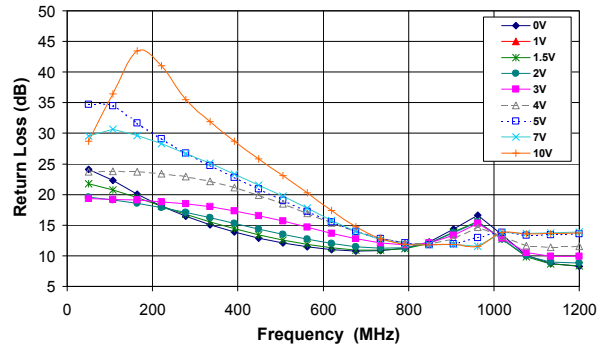


VAEQ-1000+
OUTPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES

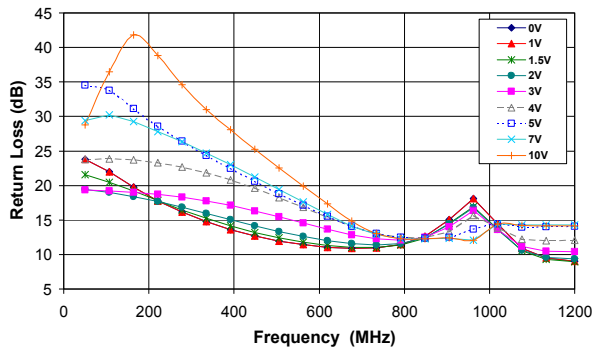


VAEQ-1000+
PHASE UNBALANCE Vs. FREQUENCY
OVER CONTROL VOLTAGES

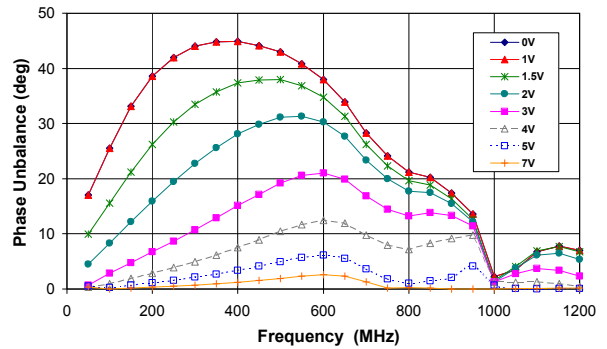

VAEQ-1000+
DEVIATION FROM LINEAR LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES

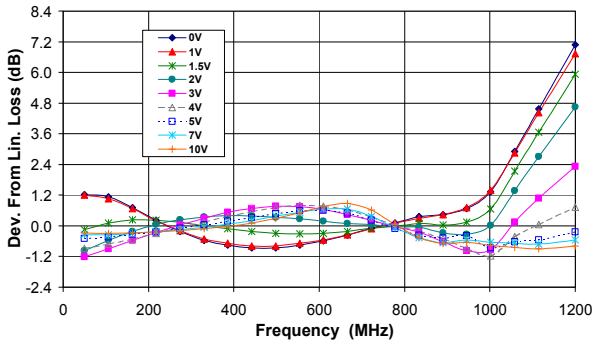

VAEQ-1000+
IP3 Vs. FREQUENCY
OVER CONTROL VOLTAGES

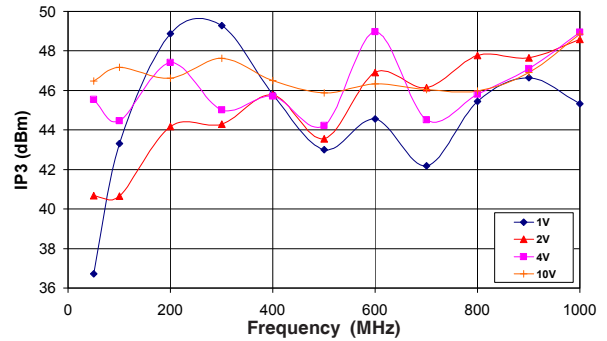

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 *The Design Engineers Search Engine* Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.