






Trimmer Capacitors

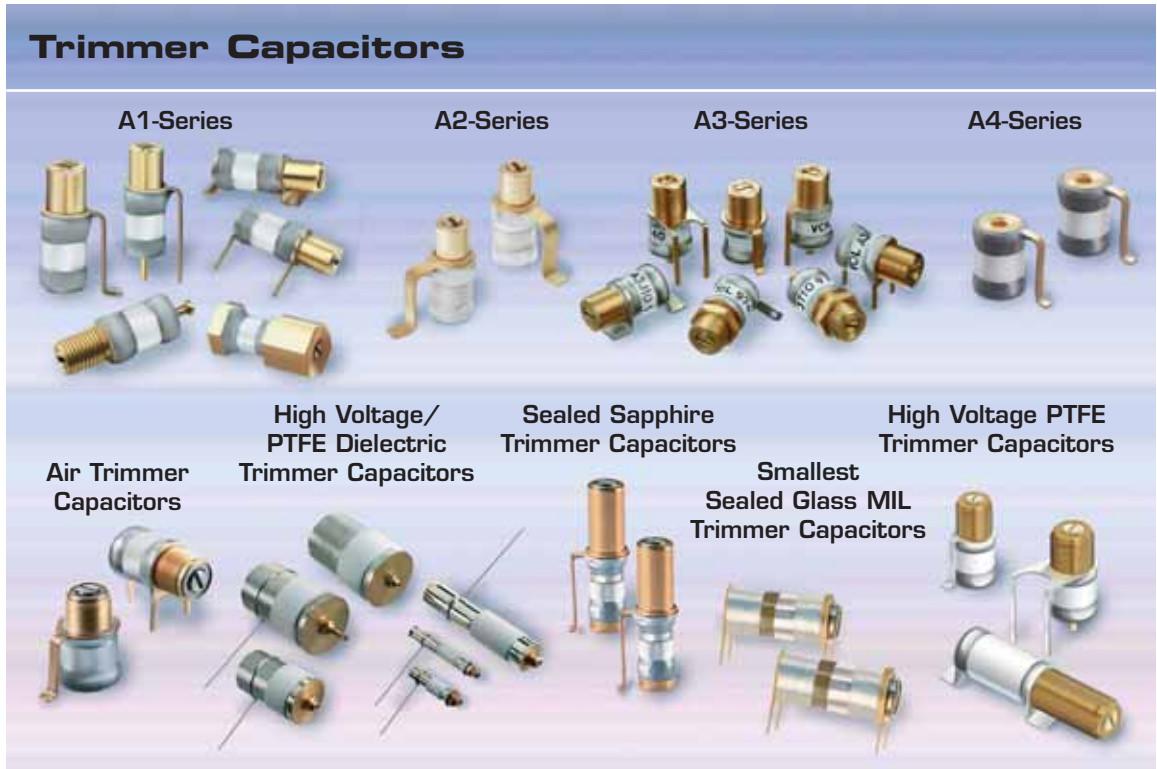


J Series Ceramic Chip Trimmer Capacitors

Most Stable Over Time

- Lowest Capacitance Drift
- Up to 50% Higher Q
- Lowest Temperature Coefficient
- Usable to Over 1 GHz
- Board Washable
- Tape And Reel
- No Exposed Metal Mechanism Under Capacitor
- Easiest Vacuum Pickup Due to Full Ring Around Screw

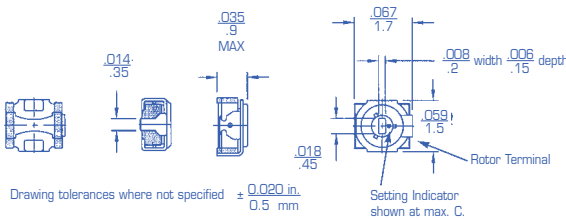

Recommended Tuning Tool For JN Series



Part Number	JN010		JN015		JN040		JN080	
Capacitance (pF) Minimum	0.55		0.7		1.5		3.0	
Capacitance (pF) Maximum	1.0	+100% - 0%	1.5	+100% - 0%	4.0	+100% - 0%	8.0	+100% - 0%
Marking Color	None		None		None		None	
DC Working Voltage	25		25		25		25	
DC Withstanding Voltage	55		55		55		55	
Temperature Coefficient (ppm/°C)	0 ± 300		0 ± 300		0 ± 500		0 ± 500	
Q (min.) at 1 MHz	500		500		300		300	
Self Resonant Frequency at Maximum Rated Capacitance	6.0 GHz		4.8 GHz		2.7 GHz		1.8 GHz	
Insulation Resistance	10 4megohms							
Operating Temperature	-25°C to +85°C							
Torque	.014 to .14 in-oz							
Packaging	All parts furnished on 8mm tape and reel. 3,000 pcs. per reel.							